




MODEL 3

STANDARD UNIT SPECIFICATIONS
 OPTIONS
 FEATURES
 APPLICATIONS


The compact, portable PositionIt Model 3 is the most versatile positioning system in the industry. Upright, the Model 3 is capable of accurately positioning equipment up to 50 lbs. The unit can lift up to 100 lbs if mounted inverted. The optional DMX control allows precise choreographed computer movements and the COBRA system provides power and control to the payload equipment such as intelligent lighting systems and surveillance cameras.

- | |
|---|
| <ul style="list-style-type: none"> ➤ Commercial Lighting and Projection Systems ➤ Surveillance Equipment ➤ Displays and Signs ➤ Residential Home Theaters, Dumbwaiters |
| <ul style="list-style-type: none"> ➤ Pendant Up/Down Control ➤ Fleenor Designed DMX Interface ➤ Variable Speed Control ➤ Adjustable Upper and Lower Limit Heights |
| <ul style="list-style-type: none"> ➤ COBRA System - Payload Cable Management (0.63 in maximum conduit ID) ➤ Black Column Cover (other colors available) ➤ Battery Power (12 or 24 VDC) |

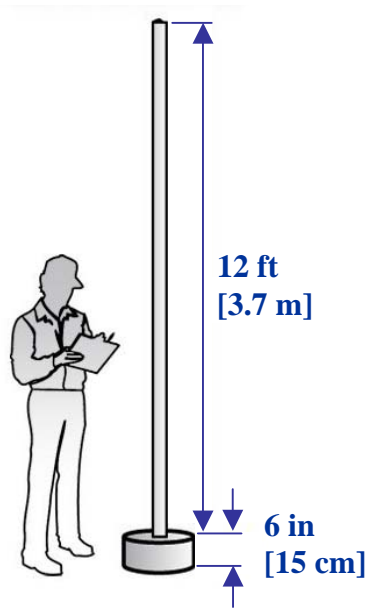

Extended

Vertical Lift Capacity	
Upright	50 lbs [23 kg]
Inverted	100 lbs [45 kg]
Standard Extension*	12 ft [3.7 m]
Standard Stroke Speed*	3 in/sec [8 cm/sec]
Power Requirements Specified Before Delivery	115 or 230 VAC
Motor HP	1/8 HP
Full Load Amps	2 Amps (115 VAC)
Base Unit Weight	80 lbs [36 kg]

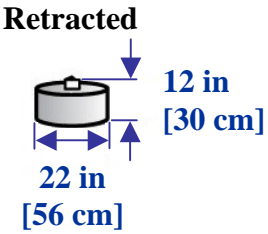

Retracted

* - Custom stroke speeds and extension lengths available